








Tipo	Peso Ventila tore						Fla	aspira	3	Flangia premente											Basamento					
Ventila tore	Motore	Kgf	A	в	С	D	Е	d	d1	d2	n°	Ø	а	b	a1	b1	a2	b2	n1xp	n2xp	n°	ø	К	м	υ	ø
TRM280/2	80 A2	32	95	440	477	200	610	205	241	275	8	12	231	166	265	200	301	236	1x112	1x112	8	12	251	200	-	12
TRM310/2	90 S2	44	105	480	527	225	658	228	265	298	8	12	258	185	292	219	328	255	1x112	2x112	10	12	276	225	-	12
TRM350/2	90 L2	69	115	530	600	255	740	255	292	325	8	12	288	205	332	249	368	285	1x125	2x125	10	12	276	225	-	12
TRM400/2	100 LA2	107	127	590	655	285	815	285	332	365	8	12	322	229	366	273	402	309	1x125	2x125	10	12	324	280	-	12
TRM450/2	132 SA2	150	141	670	735	320	915	320	366	400	8	12	361	256	405	300	441	336	1x125	2x125	10	12	374	320	-	12
TRM500/2	160 MR2	235	157	830	832	360	1000	360	405	440	8	12	404	288	110	332	484	368	2x125	3x125	14	12	444	435		12
TRM500/4	90 L4	135	157	615	032		1000	500	705	440		12	404		440	332	404				14	12	276	225		12
TRM560/2	160 L2	286	177	880	940	400	1126	405	448	485	12	12	453	322	497	366	533	402	2x125	3x125	14	12	444	435	790	12
TRM560/4	100 LB4	144	1//	705	940	400	1120	405	440	403	12	12	55	522	797	500	555	402	2×125	58125	14	12	324	280	625	12
TRM630/4	132 SA4	191	195	815	1052	450	1260	455	497	535	12	12	507	361	551	405	587	441	2x125	3x125	14	12	374	320	714	12
TRM710/4	160 M4	308	216	960	1189	500	1416	505	551	585	12	13	569	404	629	464	669	504	2x160	3x160	14	14	826	435	879	12
TRM800/4	160 L4	400	241	1010	1340	560	1591	565	629	665	12	13	638	453	698	513	738	553	2x160	3x160	14	14	926	435	948	20
TRM900/4	200 L4	580	275	1230	1500	630	1780	635	698	735	12	13	715	507	775	567	815	607	2x160	4x160	16	14	10- 26	500	1087	20





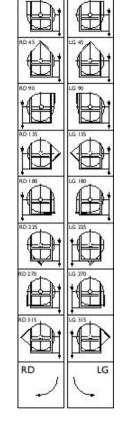

61

Peso ventilatore in kgf (completo di motore)

Tipe		Tolleranza sulla portata ± 5%										Tolleranza sulla rumorosità + 3 dB(A)															Qv mc/h			
Ventila tore	Motore	Kw	dB(A)	930	1080	1190	1330	1500	1700	1900	2150	2400	2700	3050	3450	3850	4250	5400	6150	7650	8500	9500	10800	12000	13500	15300	17000	19000	21600	24200
	Hotore	int.			pt mm H ₂ o																									
TRM280/2	80 A 2	0,75	70	130	126	120	115	95	83	69																				
TRM310/2	90 S2	1,5	73	165	164	163	160	154	142	133	121	106	88																	
TRM350/2	90 L2	2,2	78				210	210	208	204	202	192	180	168	150	130														
TRM400/2	100 LA2	3	80							242	240	238	232	219	205	186	168	141	112	74										
TRM450/2	132 SA2	5,5	84										315	310	303	295	284	260	240	215	210	160	110							\square
TRM500/2	160 MR2	11	89													392	388	384	377	352	328	300	271	227	180	120				
TRM560/2	160 L2	18,5	89																489	485	479	470	440	410	376	341	286	225	151	
TRM500/4	90 L4	1,5	69							102	101	100	97	94	86	82	75	66	54											
TRM560/4	100 LB4	3	72										130	129	127	125	120	112	104	94	83	70								
TRM630/4	132 SA4	5,5	78													170	166	163	160	156	151	142	131	115	99	75				
TRM710/4	160 M4	11	81																219	218	213	209	205	198	186	170	149	128	96	\square
TRM800/4	160 L4	15	83																			250	247	241	236	230	220	211	191	165
TRM900/4	200 L4	30	86																						334	330	326	321	315	310